

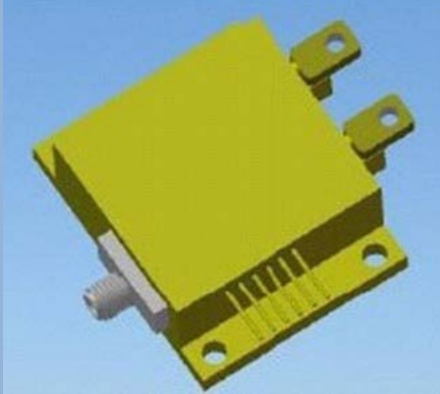
650nm~660nm 700mW Fiber Detachable LD| TEC Cooling Optional| Red Laser Diode

650nm Fiber Receptacle Laser Diode|105um 200um 400um MM Fiber

WSLR-650-700m-H

Wavespectrum Laser Group

www.wavespectrum-laser.com

650nm Fiber Detachable Diode Laser 700mW Wavespectrum Laser Group			
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +25	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C
Features: <ul style="list-style-type: none"> 650nm Fiber Detachable TEC Cooling Optional 			
Applications: <ul style="list-style-type: none"> Medical laser treatment Others 			
Specifications	WSLR-650-700m-H		
	Min	Type	Max
Center Wavelength@25°C	650nm	658nm	665nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power(After Fiber End)	----	700mW	----
Used Fiber Type	200um(105um ,400um,800um Optional)		
Recommended Operating Temperature	18°C		
Detachable Fiber Connector	FC or SMA905		
Threshold Current (Typ.)	----	1A	----
Operating Current (Typ.)	----	1.8A	----
Operating Voltage	----	2.3V	2.6V
Package Style	HHL		
Built-in TE Cooling	Optional		



Wavespectrum Laser, Inc.
 www.wavespectrum-laser.com
 wavespectrumlaser@gmail.com

